



**Sectional Plan\_LV**

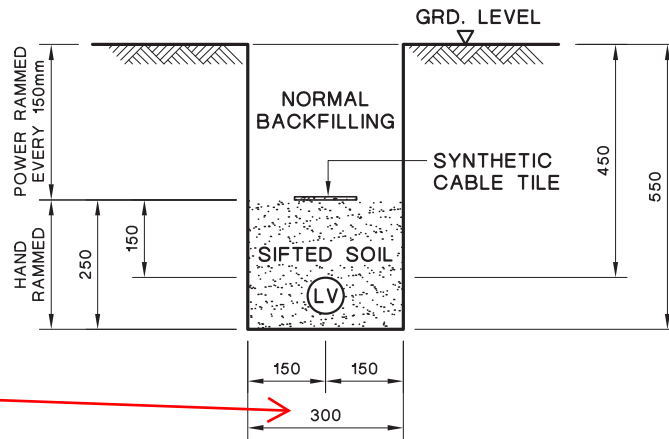

STANDARD 300mm  
(Buffer up to 1000mm)

**TYPICAL CABLE TRENCH FOR SINGLE LV CABLE**

STANDARD 550mm  
(Buffer up to 1200mm)

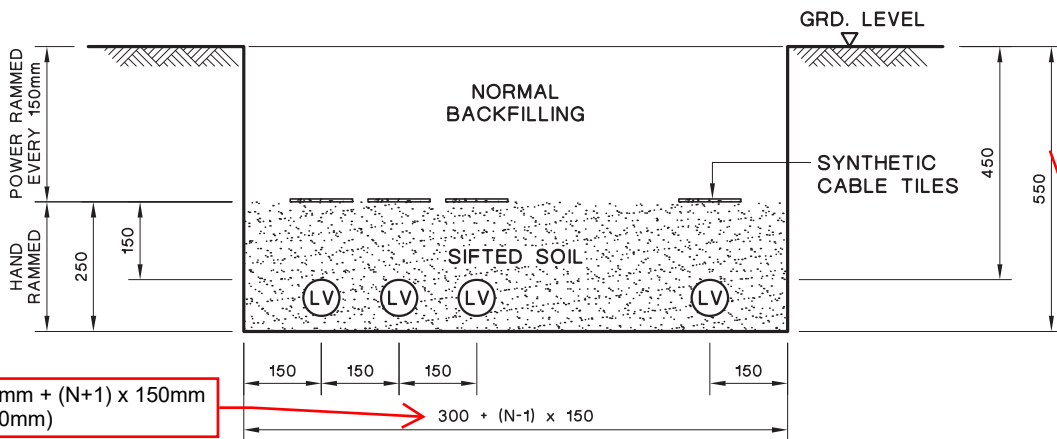

STANDARD 300mm + (N+1) x 150mm  
(Buffer up to 1000mm)

**TYPICAL CABLE TRENCH FOR MULTIPLE LV CABLES**

**LEGEND :**

- (LV) LV CABLE
- N NUMBER OF CABLE CIRCUITS

**NOTES:**

1. ALL SOIL BACKFILLING BENEATH CABLE TILES SHALL BE SIFTED THROUGH 12mm WIRE MESH.
2. ALL DIMENSIONS ARE IN mm.

C GENERAL REVISION	B GENERAL REVISION	A SYNTHETIC CABLE TILE SPECIFIED
--------------------	--------------------	----------------------------------



REVS.	16-2-04	18-6-07	28-6-07									
	A	B	C	D	E	F	G	H	J	K	L	
INITIAL	C.Y.IP	W.B.LEE	Y.K.MAN									

TITLE :  
**TYPICAL LV CABLE TRENCH**

DRAWN: S.C.T.	DATE: 15 Aug., 2003
CHECKED: K. K. LEUNG	APPROVED: W. B. LEE
SCALE: 1 : 15	SHEET(S) IN SET: 1

PROJECT NO.	CONTRACT NO.
-------------	--------------

**ASSET MANAGEMENT** DRG. NO. T GEN 25500 D E 33 0002 01 C A